


TITLE	PART No.	REV	PAGE
50 Ohm Micro Coax, 42 AWG	50MCX-37	6	1 of 1

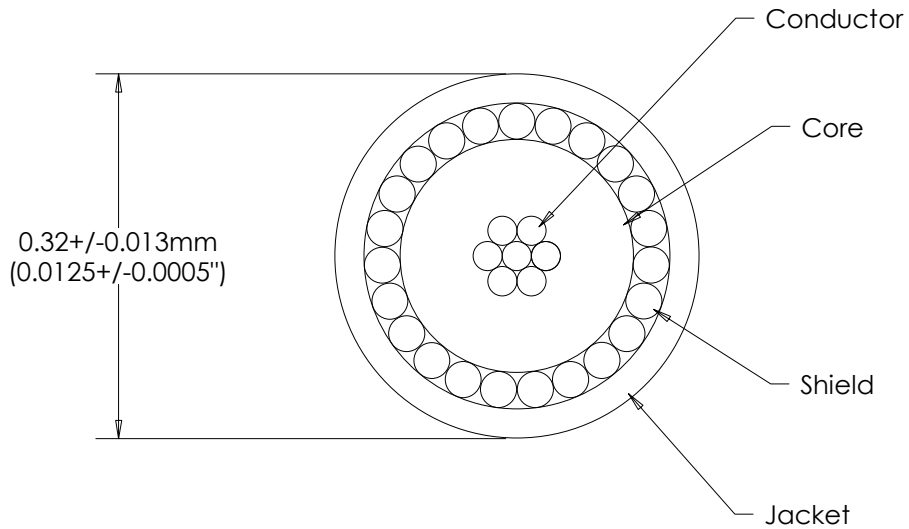

NOTES

Conductor: 42 AWG, 7/50, Silver Plated Copper Alloy

Core: PFA, 0.0025" Wall Thickness, 0.008" Diameter
Color: Yellow

Served Shield: 48 AWG, Silver Plated Copper Alloy

Jacket: PFA, 0.001" Wall Thickness
Color: Blue

This document is the property of TEMP-FLEX. If may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	5	2345	Add Micro Served Shield Option.	KP	10/26/10
	5	2993	Updated Specification Layout.	KP	7/20/12
	6	3472	Update Served Shield P/N.	KP	7/22/13